

INDIAN MEADOW

One Block Pattern by Sue Bouchard
© 2007 Quilt in a Day

Block Yardage

Background

- (2) 5" squares
- (1) 5½" square
- (2) 2½" squares

Medium #1

- (1) 7" square

Dark #1


- (1) 5" square

Dark #2

- (1) 5" square

Supplies:


- Large Flying Geese Ruler
- 6½" Square Up Ruler
- 6" x 12" Ruler
- Permanent Marking Pen

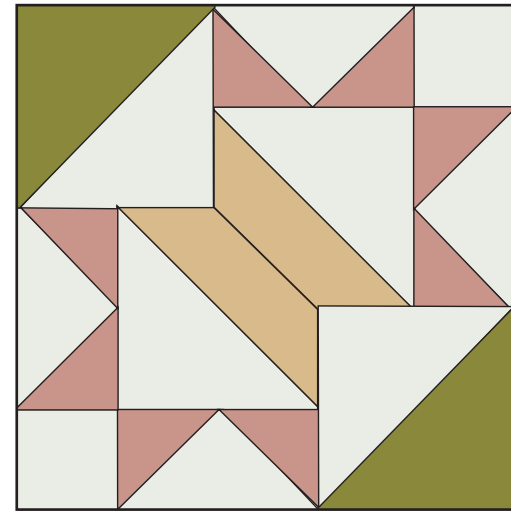

10" finished size


Making the Flying Geese

1. Pair one 7" Medium #1 square with one 5½" Background square.
2. Draw a diagonal line and sew ¼" from both sides of the drawn line.
3. Cut along drawn line and press seams toward the larger of the two triangles.
4. Place right sides together so that opposite fabrics touch. Match up the outside edges. Notice the there is a gap between the seams and they do not lock.
5. Draw a diagonal line across the seam lines. Sew on ¼" from both sides and press.
6. Cut along drawn line. Clip seam and press the seam allowances toward larger of the original squares.
7. Use the Large Flying Geese Ruler and square patches to 2½" x 4½".

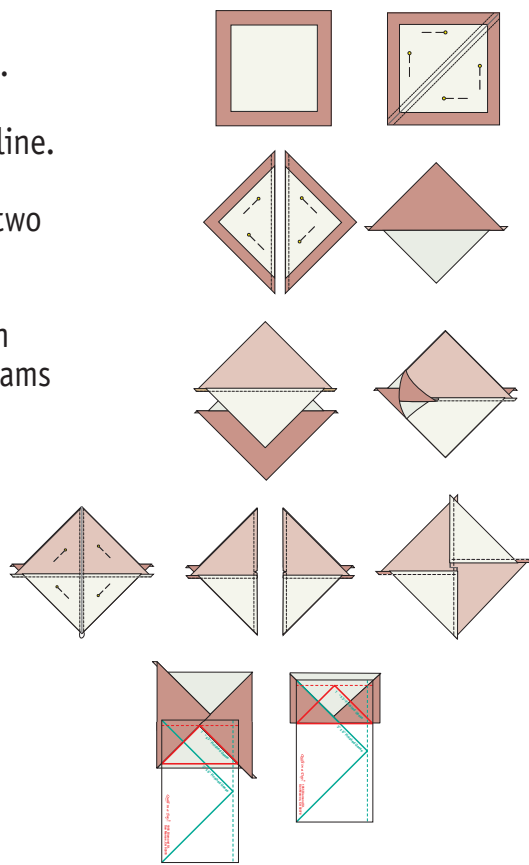


Making the Corners

1. On the wrong sides of the (2) 5" Background squares draw a diagonal line.
2. With right sides together pair one of the Background squares with a 5" Dark #1 and 5" Dark #2.
3. Sew ¼" from both sides of the drawn line. Press to set seams.

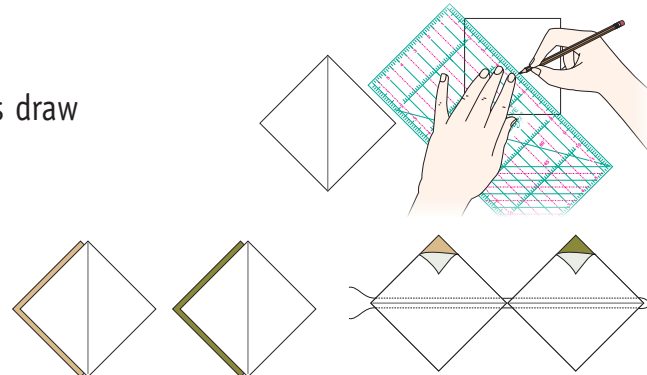


4. Cut on drawn line.
5. Using the 6½" Triangle Square Up Ruler, square patches to 4½" x 4½" square.

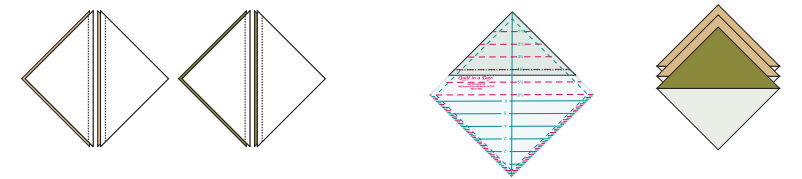


Press seam allowances toward Dark fabric.

Sewing the Geese Patches to Dark #1

1. Lay out (2) 2½" Background squares, (4) Flying Geese Patches and (2) Triangle piece squares made from the Background and Dark #2.




2. With right sides together, sew patches together.

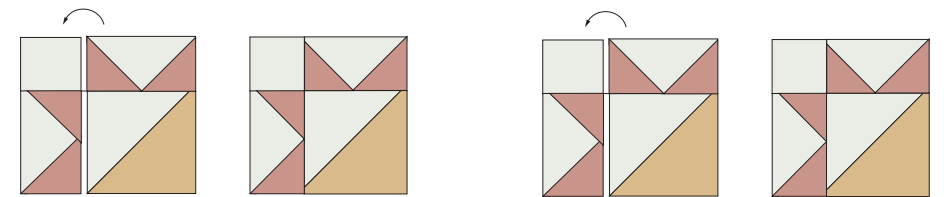


Completing Block

1. On the wrong side of the Flying Geese units mark with a dot ¼" from edge of fabric.
2. On the wrong side of (with Dark #1) place a dot ¼" on the Background.

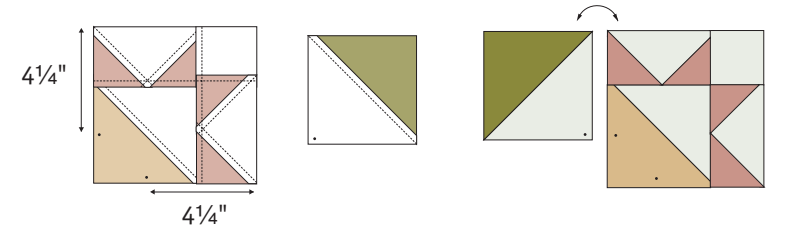

3. Lay out patches for blocks. Line up dots.

After sewing leave a tail of thread. Pull bottom thread up and tie threads together.

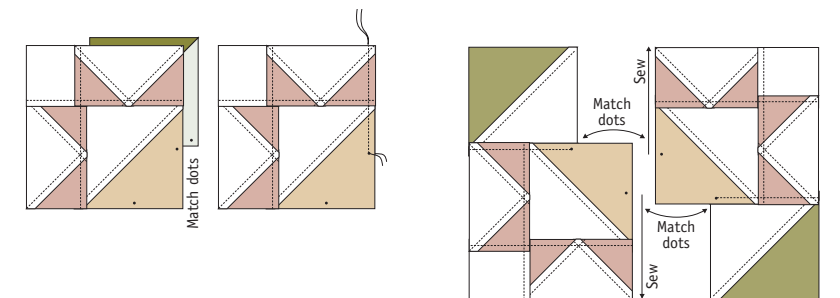

4. Fold excess to one side toward back of block. Sew along crease. Clip to leave ¼" seam allowance.

